

WAX

For Flathead Printers

FlexMark Eco

Reliable performance in printing and scanning.

Developed for rougher and uncoated label stocks, FlexMark Eco handles basic applications with ease. FlexMark Eco works well at higher print speeds and provides good print quality on both normal and rotated barcodes. When a reliable, economical wax ribbon is needed for label applications not requiring the durability of a resin-enhanced wax, FlexMark Eco is the ideal product.

ISEGA approval of FlexMark Eco guarantees safe use for food packaging applications.

Benefits


- Handles basic applications with ease
- Good print quality
- Great printing on vellum
- Reliable, economical wax ink
- Print speeds up to 8 IPS

Applications

- General purpose
- Shipping, warehousing and receiving
- Retail tag and label
- Apparel ticketing
- Compliance

Performance

Vellum

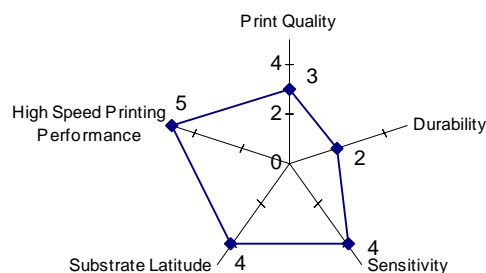


Isega Approved Product



All company and/or names are trademarks and/or registered trademarks of their respective owners.

Recommending a ribbon



Technical Specifications

- Colour Code Tab Red
- Maximum Print Speed ... 8 IPS
- Film Thickness 4.5 μ
- Total Ribbon Thickness ... 7.5 μ
- Transmission Density 1.75 MacBeth Scale
- Ink Melting Point.....68°C
- Storage Condition
-5 ° to 40 ° C
20 % to 85 % Humidity

Sample FlexMark Eco Ribbons

- Part # CES11029 – 110mm x 50m – CSI
- Part # CES11028 – 110mm x 50m – CSO